



PRODUCT CATALOGUE

Fiber Optic | FTTH | Structure Cabling | Rack & Cabinet | Power Supply

TELCORA



EMPOWERING CONNECTIVITY

PT USAHA TRINITAS MAKMUR
Jakarta, Indonesia
<https://utrinitas-m.co.id/>

FIBER OPTIC CABLE

OUTDOOR ARMoured STRANDED TUBES CABLE



INDOOR BREAKOUT CABLE



INDOOR DISTRIBUTION CABLE



OUTDOOR AERIAL STRANDED TUBES CABLE




OUTDOOR ALL DIELECTRIC STRANDED TUBE CABLE



OUTDOOR DOUBLE ARMoured STRANDED TUBES CABLE




OUTDOOR ADSS STRANDED CABLE

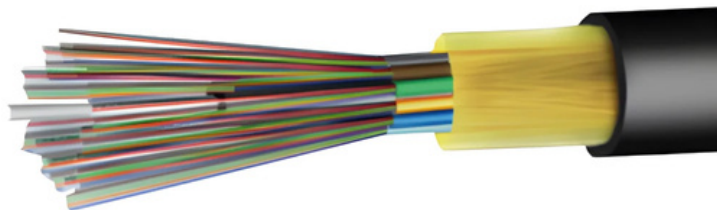

FIBER OPTIC PATCH CORDS

FIBER PIGTAILS (LC, SC, FC)

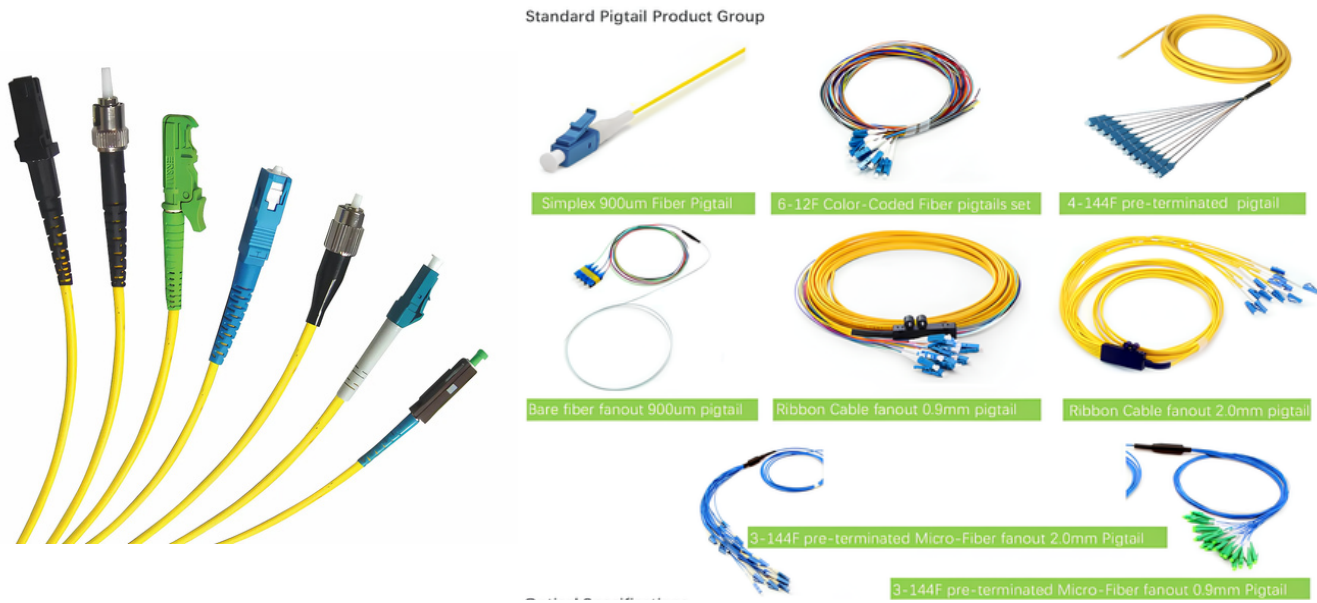

FIBER PATCH CORD ASSEMBLY



FIBER OPTIC CLOSURE

OPTICAL DOME CLOSURE (24, 48, 96, 144 PORTS)




OPTICAL INLINE CLOSURE (24, 48, 96, 144 PORTS)



FIBER CONVERTERS

FIBER TO UTP CONVERTER

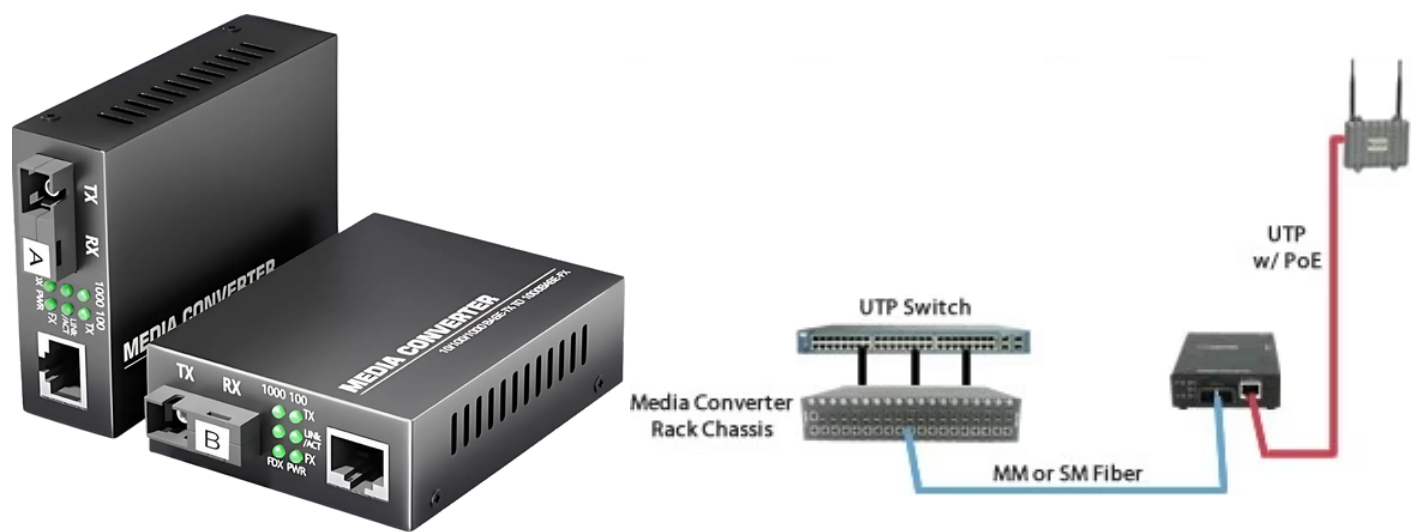

CONVERTER 10/100/100M GIGABIT SC CONVERTER 40KM




CONVERTER 10/100/100M GIGABIT SC CONVERTER 20KM



FIBER MANAGEMENT SYSTEM

FTDS FIBER MANAGEMENT SYSTEM

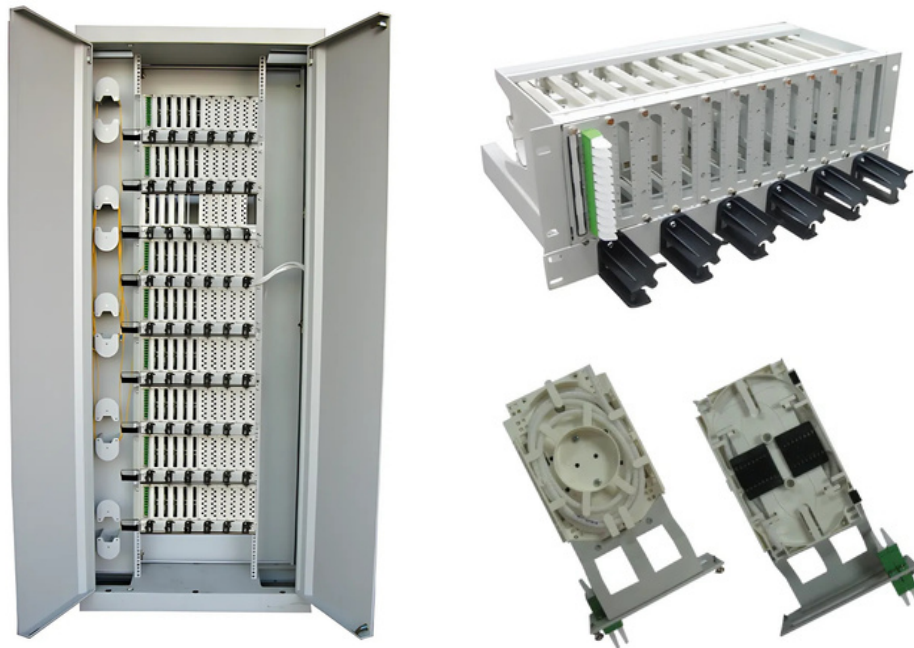

FTDC FIBER MANAGEMENT SYSTEM



RFPO FIBER DISTRIBUTION PANEL (PULL OUT TYPE)



FIBER MANAGEMENT SYSTEM

RFPP FIBER DISTRIBUTION PANEL (PULL OUT TYPE)



ODP OUTDOOR FIBER DISTRIBUTION BOX



WFP WALL MOUNT FIBER DISTRIBUTION BOX



FIBER OPTIC CONNECTORS & ADAPTERS

FIBER FIXED ATTENUATOR (SC, LC, FC)



FIBER OPTIC CONNECTOR (SC, LC, FC)



FIBER OPTIC CONNECTORS & ADAPTERS

FIBER OPTIC ADAPTER (SC, LC, FC)



FIBER HYBRID ADAPTER



FIBER TESTER & TOOLS

FIBER BASIC TOOL KIT



FIBER CLEANING KIT



FIBER TERMINATION TOOL KIT



FIBER OPTIC TRANSCEIVER

1.25GBPS SFP TRANSCEIVER, 10KM REACH HOT PLUGGABLE, DX LC



1.25GBPS SFP TRANSCEIVER DX LC SM DDM 40KM, HOT PLUGGABLE




1.25GBPS SFP TRANSCEIVER, 10KM REACH HOT PLUGGABLE, DX LC



PASSIVE PRODUCT & ACCESSORIES

OPTICAL COUPLER / SPLITTER

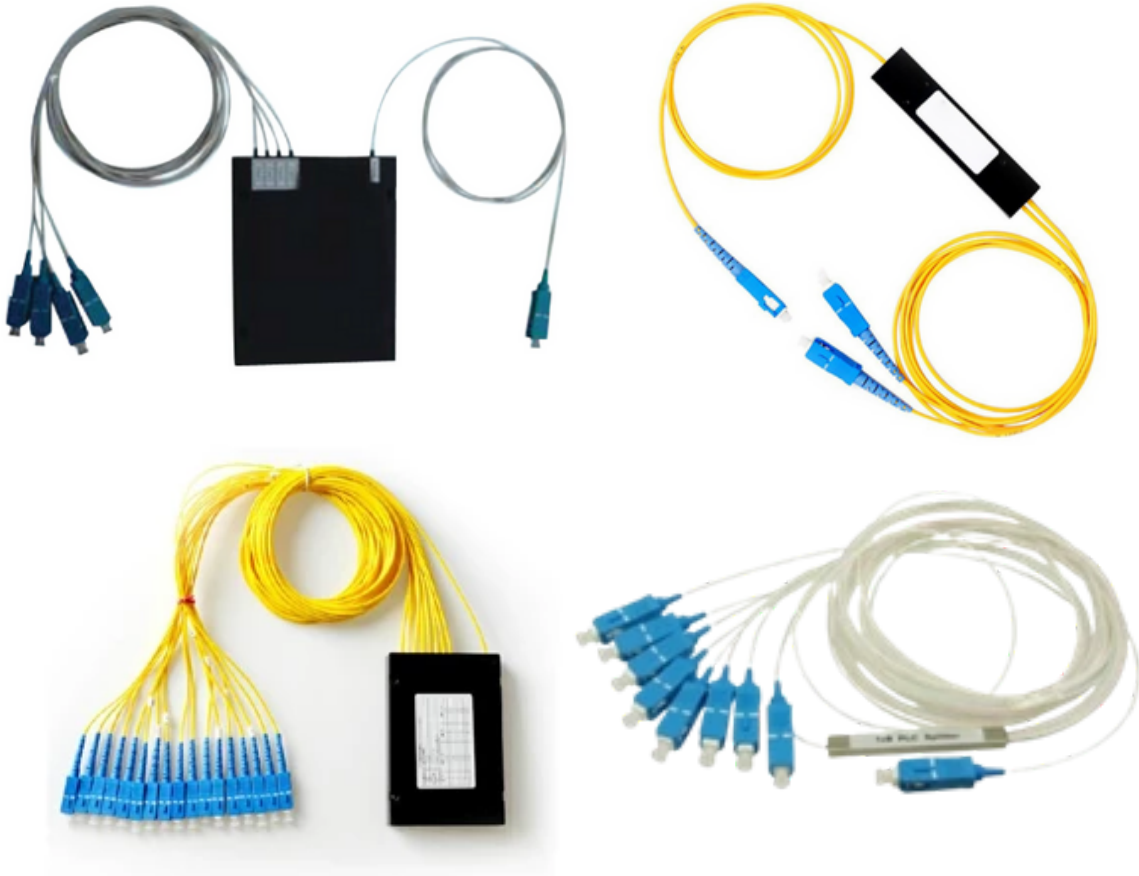

FIBER HEAT SHRINK SLEEVE-RIBBON



FTTH SOLUTIONS

FTTH FIBER WALL SOCKET




FIELD INSTALLABLE CONNECTOR



PRE-CONNECTORIZED DROP CABLE



SPLITTER TRAY

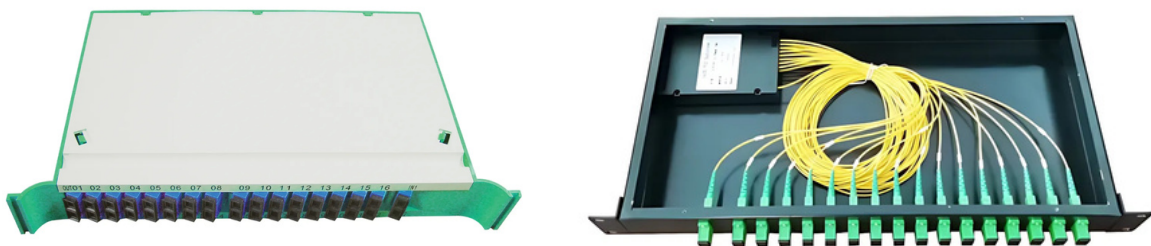

FTTH SOLUTIONS

LGX CASSETTE SPLITTER



FTTH INDOOR DROP CABLE



FTTH OUTDOOR DROP CABLE



FTTH AERIAL DROP CABLE




FTTH SOLUTIONS

FTTH FIBER DISTRIBUTION CABINET (INDOOR & OUTDOOR)




FIBER TERMINATION BOX (4, 12, 24, 48 PORT)

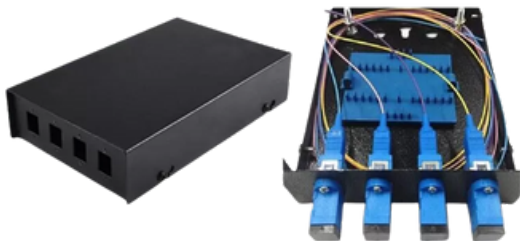

RF ACCESSORIES

FEEDER CABLE COPPER 1/2" AND 7/8"

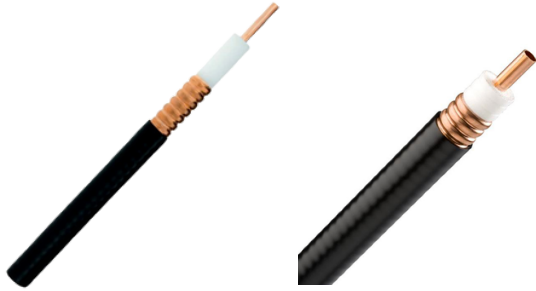

FEEDER CABLE ALUMINIUM 1/2" AND 7/8"



RF FEEDER CONNECTOR (N MALE, N FEMALE, DIN MALE, DIN FEMALE)



Din Male

Din Female

N Male

N Female

RF OMNI INDOOR/OUTDOOR ANTENNA



RF MIMO INDOOR/OUTDOOR ANTENNA




RF ACCESSORIES

SPLITTER



COMBINER

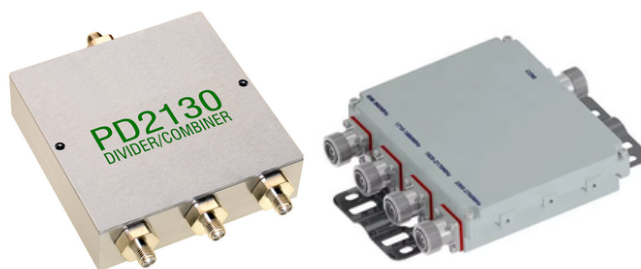

ATTENUETOR



GROUNDING KIT




RF JUMPER



STRUCTURE CABLING


CAT 6 UTP CABLE

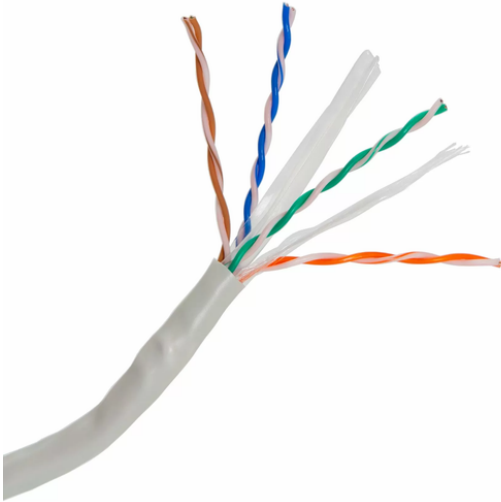

CAT 6 UTP PATCH CHORDS




CAT 6 UTP PATCH PANELS

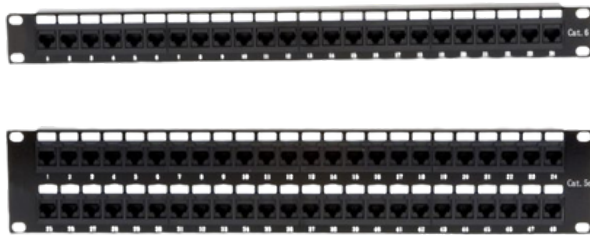


CAT 6 UTP OUTDOOR CABLE



CAT 6 UTP MODULAR JACK

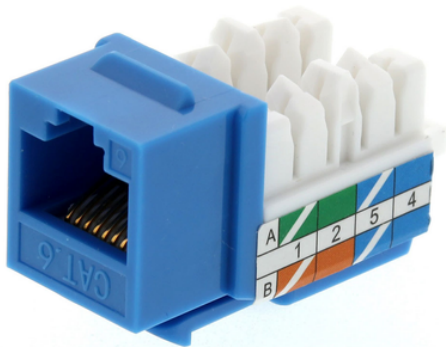

CAT 6 UTP MODULAR PLUG

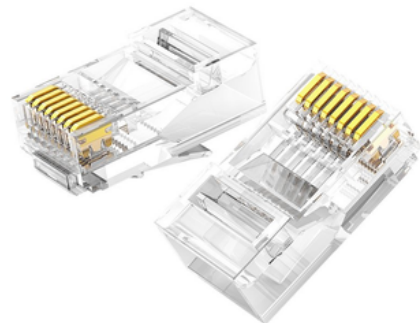

FIBER OPTIC TOOLS

GENERAL CABLE CUTTER



GENERAL WIRE STRIPPER



GENERAL MULTI METER



RACK & CABINET

SERVER RACKS

19" FREE STANDING ACCUMENT RACK (4U, 6U, 12U, 24U, 33U, 36U, 42U)



OUTDOOR & INDOOR CABINET

Open Cable Management System Rack



Close Cable Management System Rack



19" Wallmount Rack (6U,9U, 15U)



Outdoor Weatherproof Cabinet



Open System Rack





50W Single Output Switching Power Supply

LRS-50 series



■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 second
- No load power consumption<0.3W
- Miniature size and 1U low profile
- High operating temperature up to 70°C
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compliance to IEC/BS EN/EN 60335-1(PD3) and IEC/BS EN/EN61558-1, -2-16 for household appliances
- Operating altitude up to 5000 meters (Note.8)
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- LED indicator for power on
- Over voltage category III
- 100% full load burn-in test
- 3 years warranty

■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Household appliances

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



100W Single Output Switching Power Supply

LRS-100 series



■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 second
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Miniature size and 1U low profile
- Compliance to IEC/BS EN/EN 60335-1(PD3) and IEC/BS EN/EN61558-1, 2-16 for household appliances
- Operating altitude up to 5000 meters (Note.7)
- Withstand 5G vibration test
- LED indicator for power on
- No load power consumption<0.3W
- Over voltage category III
- 100% full load burn-in test
- High operating temperature up to 70°C
- High efficiency, long life and high reliability
- 3 years warranty

■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Household appliances

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



150W Single Output Switching Power Supply

LRS-150 series



■ Features

- AC input range selectable by switch
- Withstand 300VAC surge input for 5 second
- No load power consumption<0.5W
- Miniature size and 1U low profile
- High operating temperature up to 70°C
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Compliance to IEC/BS EN/EN 60335-1(PD3) and IEC/BS EN/EN61558-1, 2-16 for household appliances
- Operating altitude up to 5000 meters
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- LED indicator for power on
- Over voltage category III
- 100% full load burn-in test
- 3 years warranty

■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Household appliances

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>